

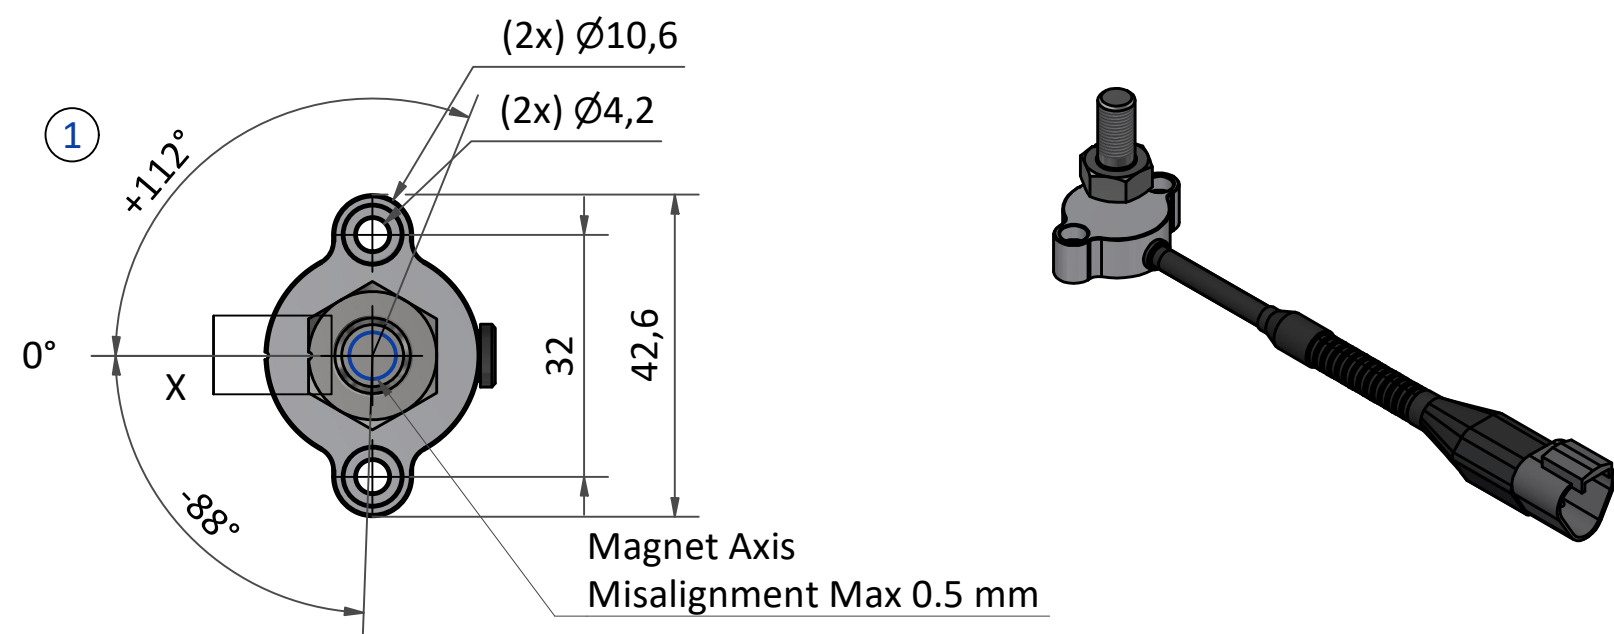
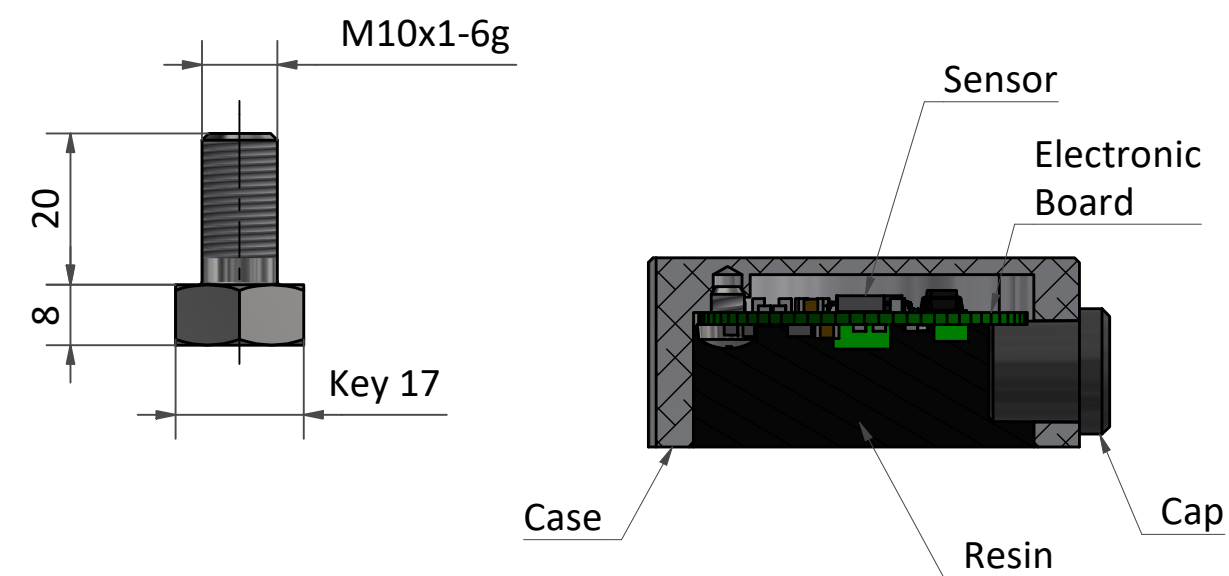
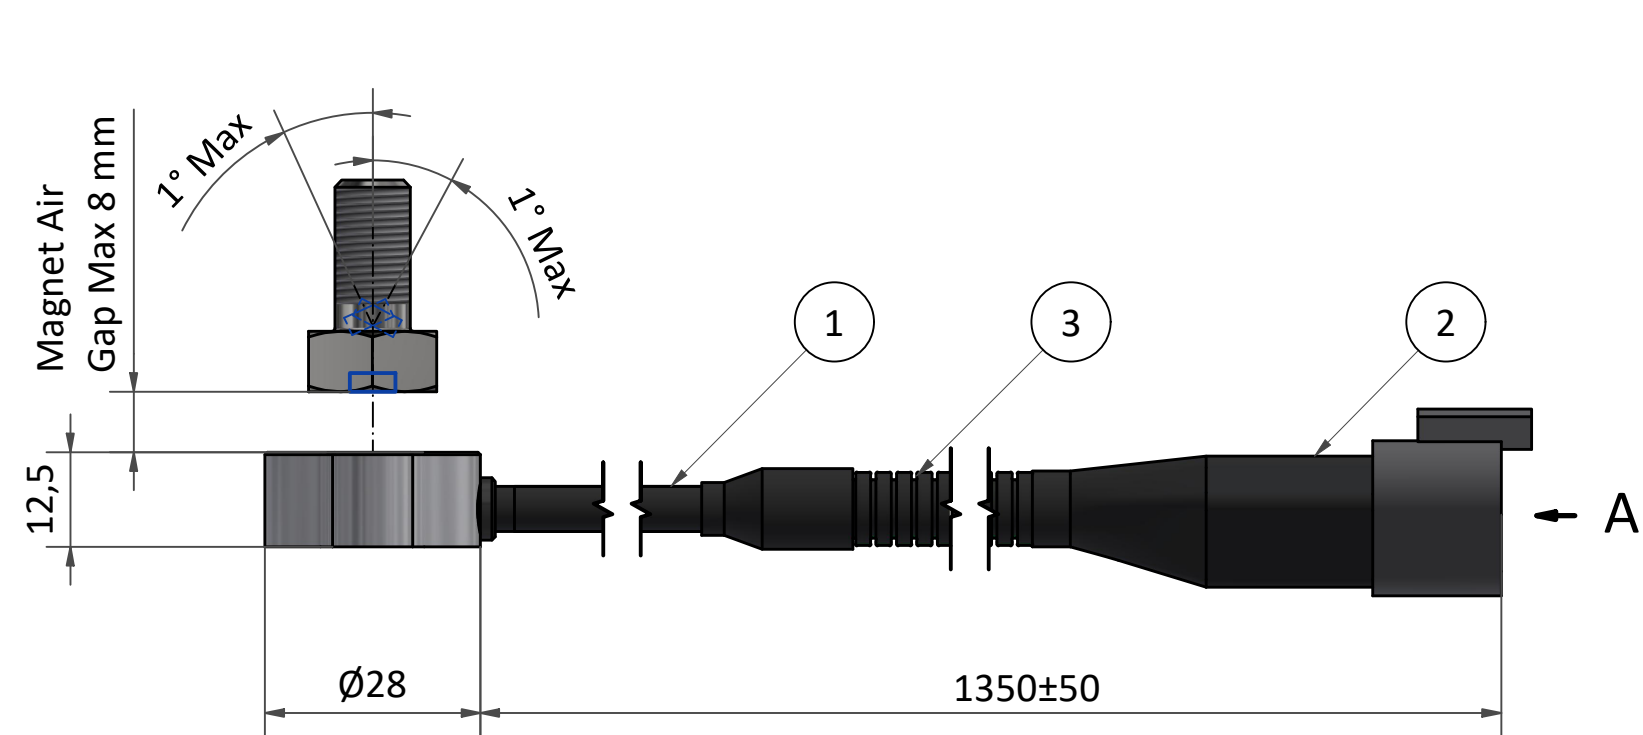


■ Contactless Angular Sensor

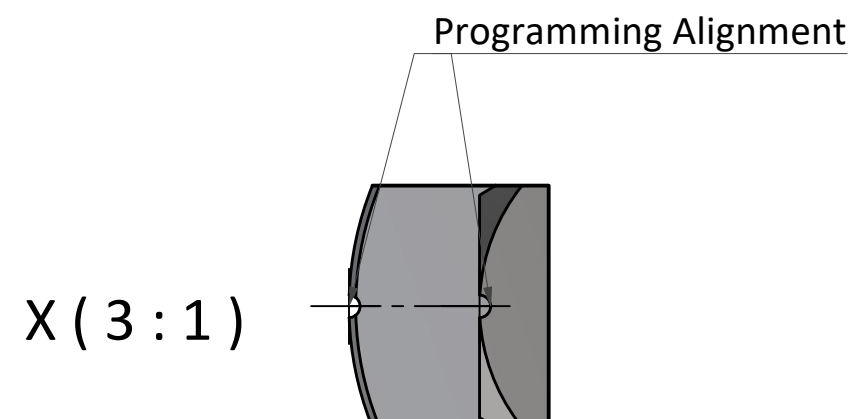


View from "A"

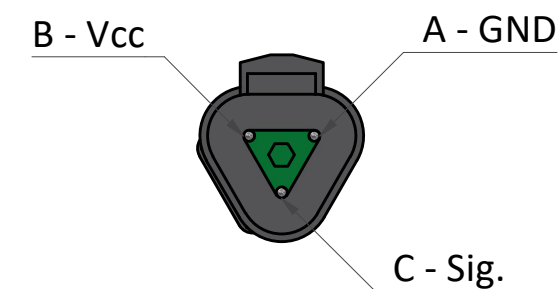


Ref.	Description	Operating Temperature
1	HT 105° Cable	-25 / +105
2	3 Way Tyco Superseal Connector or compatible	-40 / +125
3	Corrugated Sheath	[-40 / +135] for 3000h [-40 / +150] for 500h

 ELEN industrial vehicles sensors				www.elensrl.com		Elen Srl - Caronno Pertusella (VA)			
				Part Number:		AA020515-52			
				Description:		Contactless Angular Sensor 10-30V			
Rev.	Date	Sign.	Review Description	Designed	19/01/2026	Giulia M.	Scale : 1 : 1 (A3 format)		
1	21/01/2025	G.M.	Updated Angle Range & Signal Output	Checked	19/01/2026		Dimensions without tolerance indication: ISO 2768 - m		
				Approved	19/01/2026		Units mm	Page 1 / 2	


■ Output Signal ①

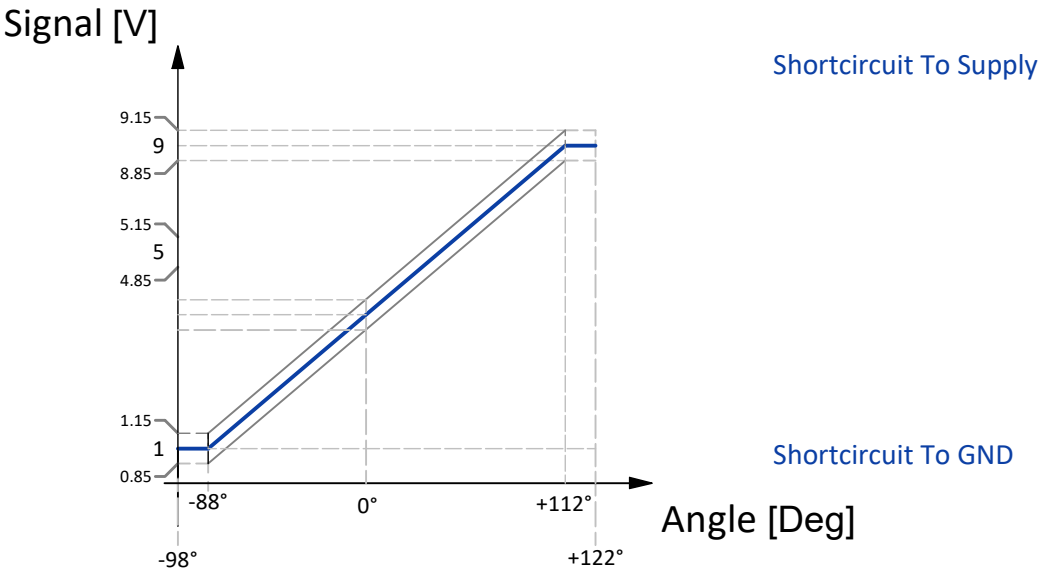

■ Functional Scheme

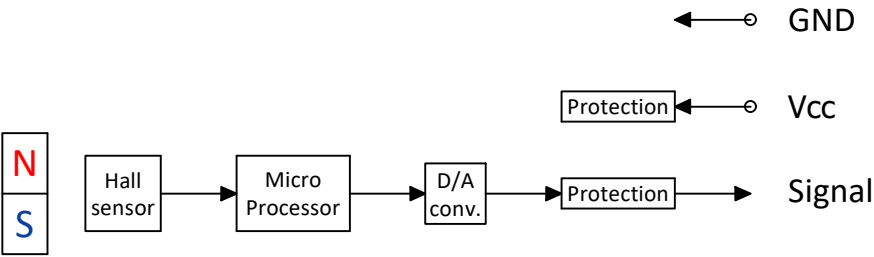

■ Typical Application

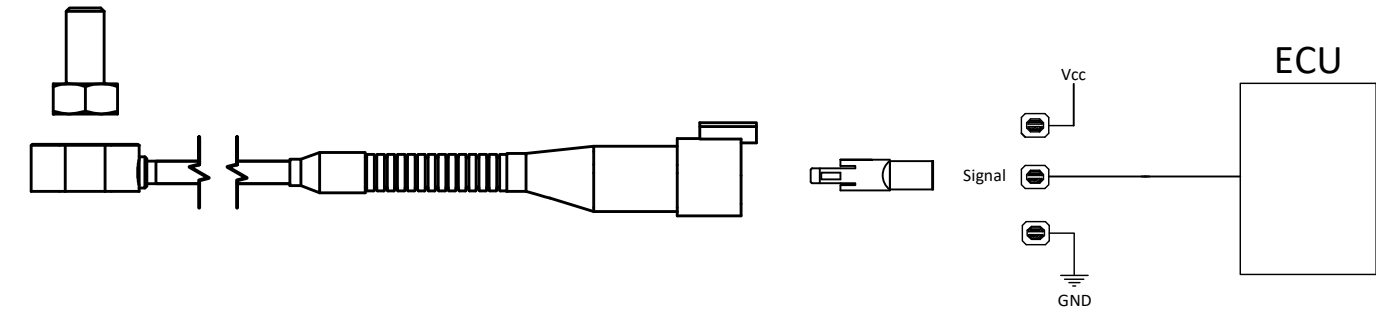

■ Technical Specifications

	Specific	Value	Standard Reference
Electrical	Power Supply (Vcc)	10V Min ÷ 30V Max	PDV Rev. 3 - P. 5.1;
	Output Current	20mA Max	PDV Rev. 3 - P. 5.5;
	Supply Current (no load)	30mA Max	PDV Rev. 3 - P. 5.2;
	Linear Output	1V ÷ 9V [±0.15 V] (5V @ 0°)	-
	Overload Protection	24mA For 1h	PDV Rev. 3 - P. 5.6;
	Overvoltage Protection	32V for 1h	PDV Rev. 3 - P. 5.7;
	Temperature Operating Voltage	30V @ 105° For 1h	PDV Rev. 3 - P. 5.8;
	Reverse Polarity Protection	-30V For 1h	PDV Rev. 3 - P. 5.3;
	Shortcircuit Protection	To Ground For 5' ; To Supply For 5'	PDV Rev. 3 - P. 5.4;
	Insulation Resistance	1000MΩ@500V	PDV Rev. 3 - P. 5.10;
	Dielectric Rigidity	750V@50Hz For 60s	PDV Rev. 3 - P. 5.11;
	ESD Protection	±8kV Contact; ±15kV Air	EN 61000-4-2;
	Transient Voltage Protection	Pulses 1, 2A, 2B , 3A , 3B , 4	ISO 7637-2; ISO 16750-2 (2012)
	Load Dump Transient	Test A (V supply 24V)	ISO 16750-2 (2012)
Environmental	Resolution	12 bit	-
	Operating Temperature (for Electronic Components)	-40°C ÷ +105°C	IEC 60068-2-14;IEC60068-2-1; IEC60068-2-2;IEC60068-2-30
	Storage Temperature (for the Assembly)	-25°C ÷ +105°C	IEC 60068-2-14;IEC60068-2-1; IEC60068-2-2;IEC60068-2-30
	Degree Of Protection	IP67	IEC 60529;
	Vibrations Resistance - Random	f=10Hz@PSD=1.44g ² /Hz; f=100Hz@PSD=3.85 g ² /Hz; f=1000Hz@PSD=3.85g ² /Hz; f=2000Hz@PSD=0.96g ² /Hz; 3 Axes - 24h for Axis	IEC 60068-2-64; ENS 0310 Rev.J
	Vibrations Resistance - Sine	(5÷12.87)Hz@dis±15mm, (12.87÷200)Hz@dis<±15mm@5g, 1 Octave/min, 20 Sweep Cycles	EN 60068-2-6; ISO 15998
Mech.	EMC Compatibility - Magnetic Field Immunity	15Hz ÷ 150 kHz	ISO11452-8:2007;
	EMC Compatibility - BCI	BCI Class "A" - 100mA; (1÷400)MHz	ISO11452-4;
	Body Material	Aluminium With Antioxidant Treatment	-
	Shaft Material	Stainless Steel	-