

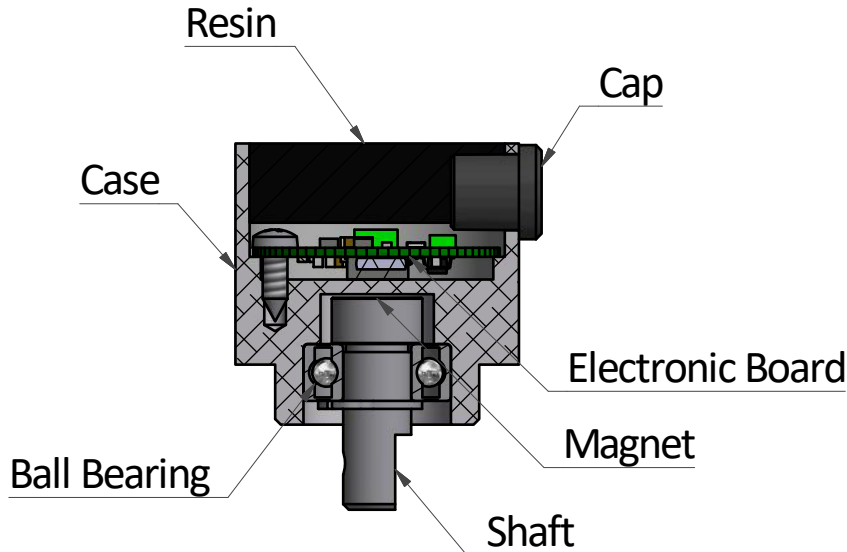
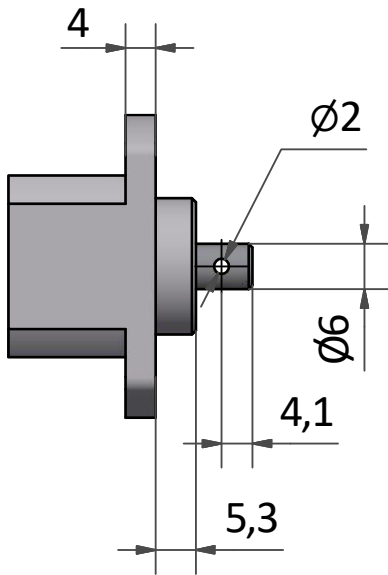
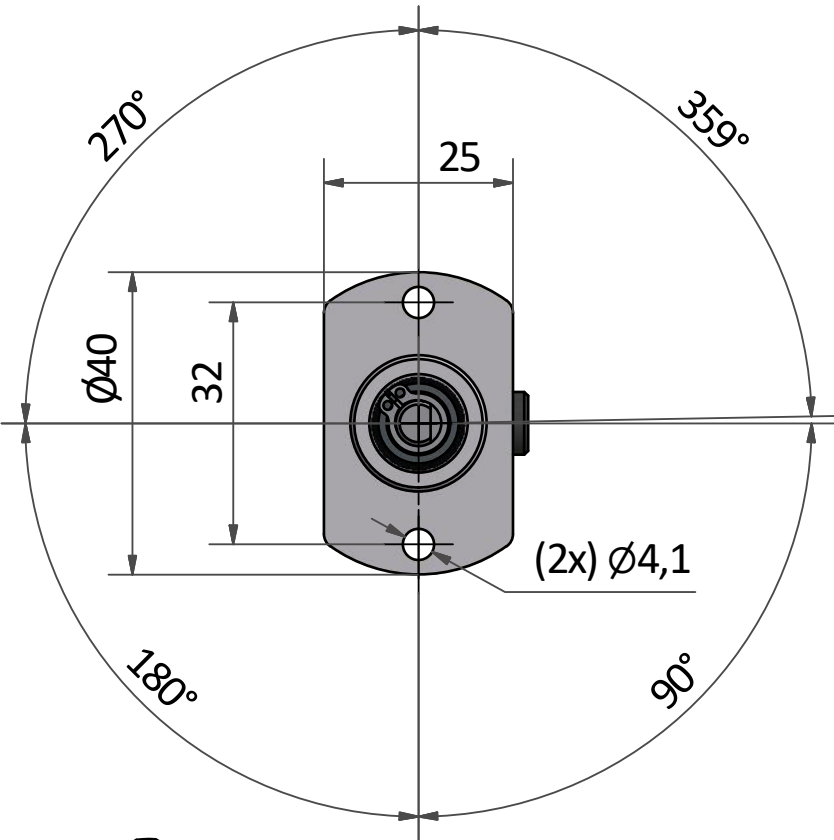


■ Angular Sensor

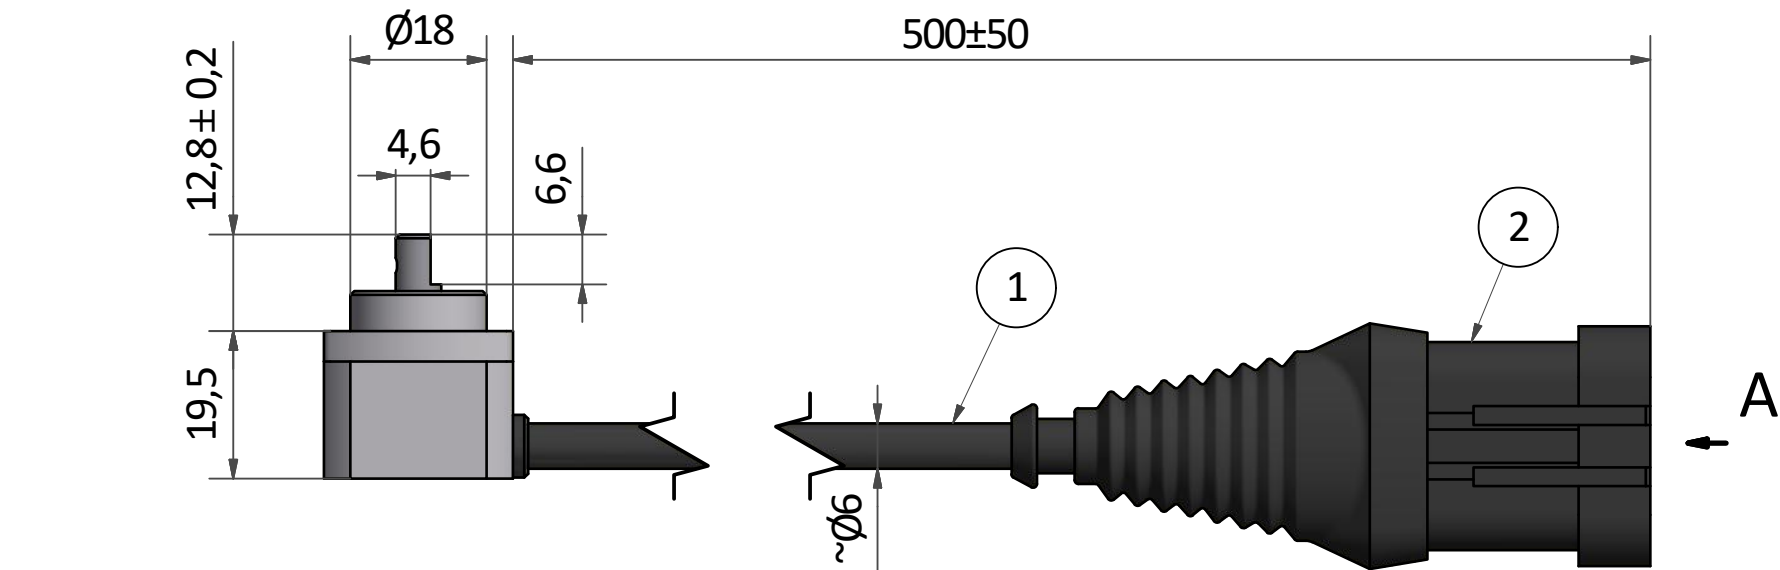

A (1.5 : 1)

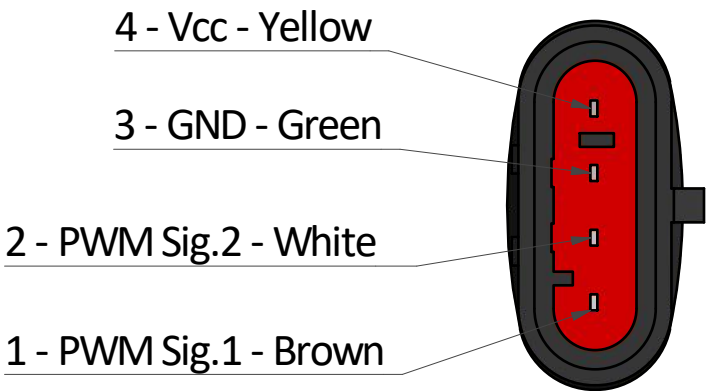

Ref.	Description	Operating Temperature
1	Cable HT 105°C	-25 / +105
2	4 Pin Tyco Superseal 1.5 Series Connector	-30 / +125



www.elensrl.com Elen Srl - Garbagnate Milanese (MI)


Part Number: AA020561-42

Description: Angular Sensor 360° 5V Double Sig. PWM


Rev.	Date	Sign.	Review Description

Designed	05/09/2022	Matteo M.	Scale :	1 : 1 (A3 format)
Checked	-	-	Dimensions without tolerance indication: ISO 2768 - m	
Approved	-	-		Units mm


■ Output Signal

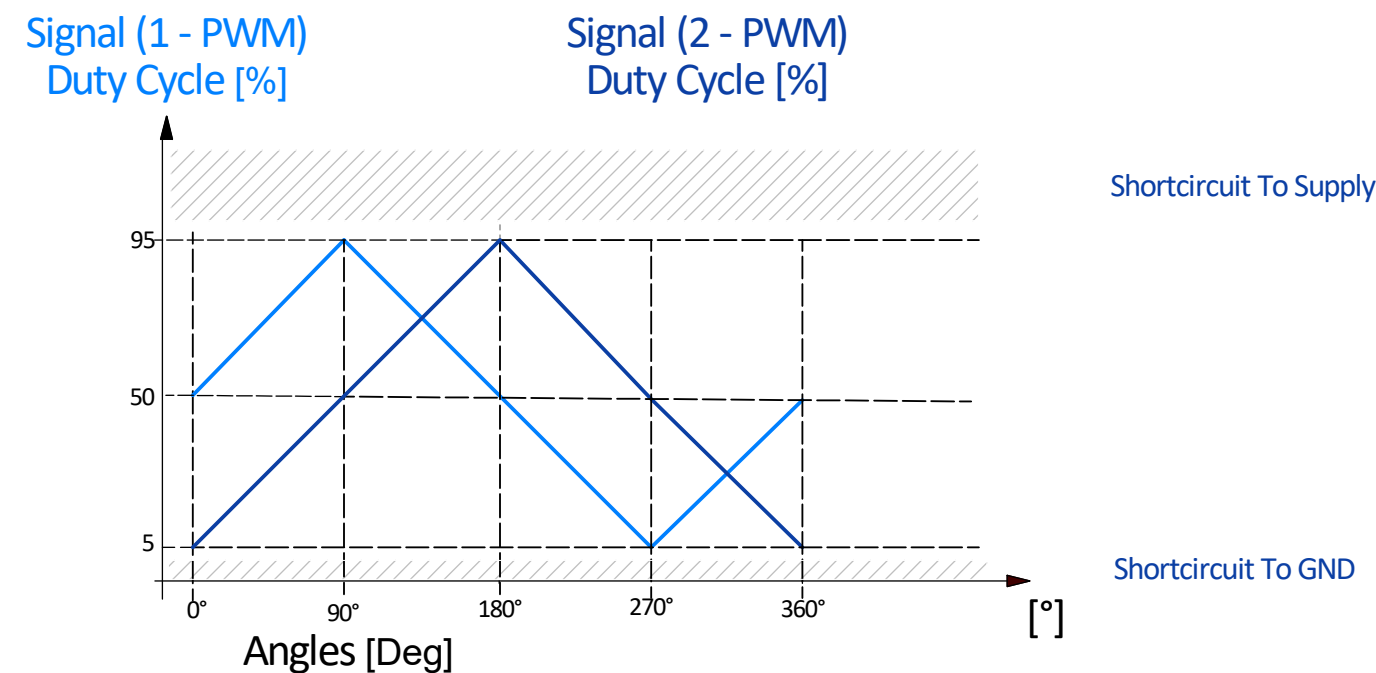

■ Functional Scheme

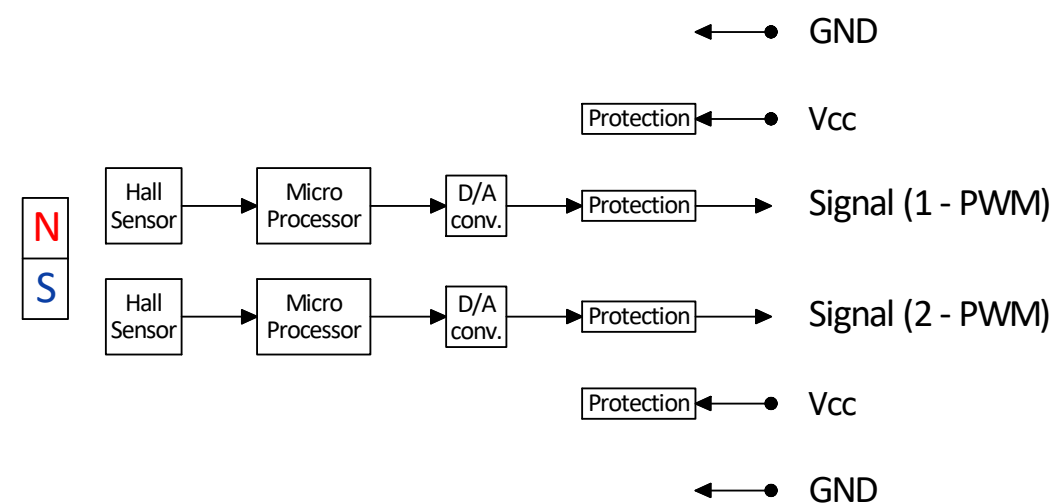

■ Typical Application

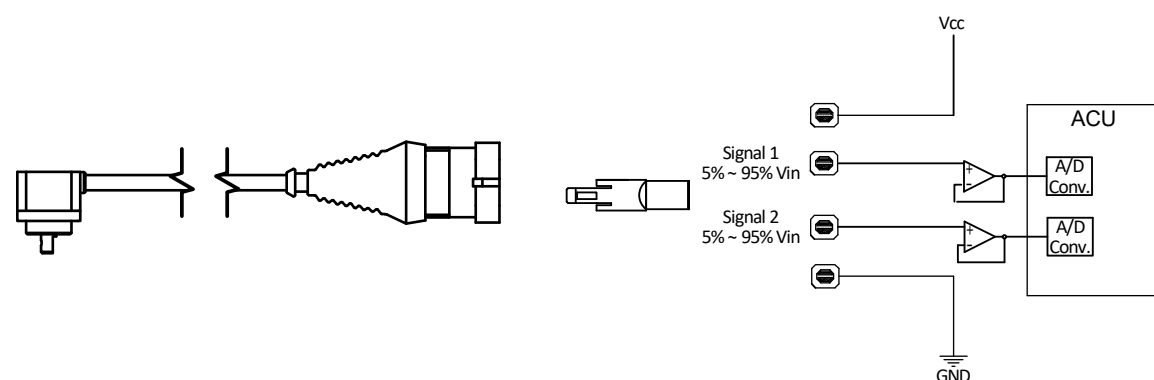

■ Technical Specifications

	Specific	Value	Standard Reference
Electrical	Power Supply (Vcc)	Min 4,5V - Max 5,5V	ELEN PDV Rev. 3 - 5.1
	Supply Current	<= 20mA (For Channel)	ELEN PDV Rev. 3 - 5.2
	Reverse Polarity Protection	-5.5V For 1h	ELEN PDV Rev. 3 - P. 5.3;
	Electrostatic Discharge Protection	±8kV Contact ; ±15kV Air Discharge	EN 61000-4-2
	Overload Protection	1.2 mA For 1h	ELEN PDV Rev. 3 - 5.6
	Overvoltage Protection	+6.5 V For 1h	ELEN PDV Rev. 3 - 5.7
	Output Current	1 mA Max	ELEN PDV Rev. 3 - 5.5
	Dielectric Rigidity	750V@50Hz For 60s	ELEN PDV Rev. 3 - 5.11
	Insulation Resistance	1000 MOhm@500V	ELEN PDV Rev. 3 - 5.10
	EMC Compatibility	BCI - Class "A" - 100mA ; 1~400 MHz	ISO 11452-4
	Output 1 (With 5V Power Supply) - PWM Channel	Duty Cycle = 5 ÷ 95 [%] ±1[%] See Picture	-
	Output 2 (With 5V Power Supply) - PWM Channel	Duty Cycle = 5 ÷ 95 [%] ±1[%] See Picture	-
	Temperature Operating Voltage	5.5V@105°C For 1h	ELEN PDV Rev. 3 - 5.8
	Resolution	12 bit	-
	Linear Error	< ±1%	-
Environmental	Shortcircuit Protection	To Ground For 5' ; To Vcc For 5'	ELEN PDV Rev. 3 - 5.4
	PWM Signal Frequency	200Hz±40Hz	-
	Operating Temperature	-40°C ~ +105°C	IEC 60068-2-1; IEC 60068-2-2; IEC 60068-2-30; IEC 60068-2-14
	Storage Temperature	-40° ~ +105°C	IEC 60068-2-1; IEC 60068-2-2; IEC 60068-2-30; IEC 60068-2-14
	Degree of Protection	IP 67	IEC 60529
Mech.	Vibrations Resistance - Sine	(5÷12.87) Hz@dis±15mm ,(12,87÷200) Hz@dis<±15mm@5g, 1 Octave/min , 20 Sweep Cycles	EN 60068-2-6 ISO 15998
	Vibrations Resistance - Random	f=10Hz@PSD=1.44g ² /Hz; f=100Hz@PSD=3.85 g ² /Hz, f=1000Hz@PSD=3.85g ² /Hz, f=2000Hz@PSD=0.96g ² /Hz; 3 Axes - 24h for Axis	IEC 60068-2-64; ENS 0310 Rev.J
	Body Material	Aluminium With Antioxidant Treatment	-
	Shaft Material	Stainless Steel	-