

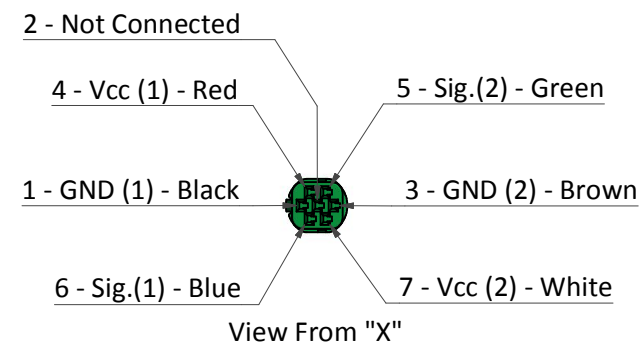
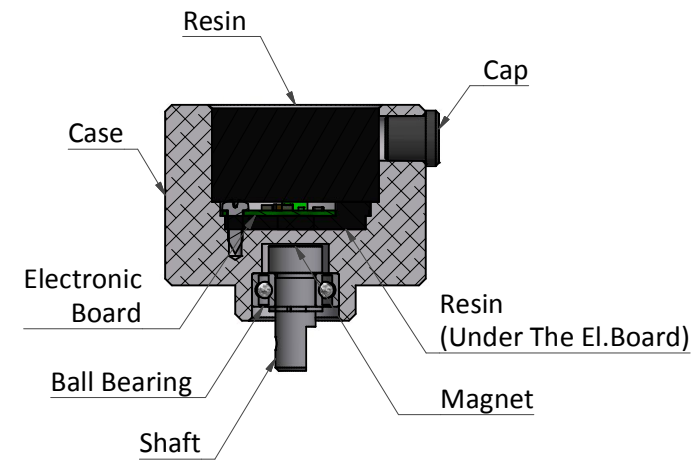
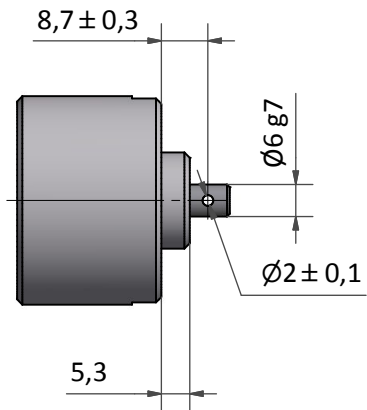


■ Angular Sensor

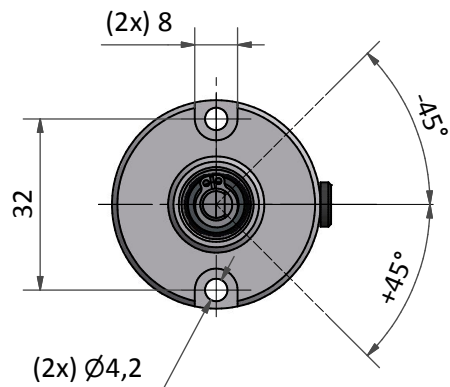

Ref.	Description	Operating temperature
1	Cable HT 105°C	-30 / +105
2	7 Pin Tyco Mini-Multilock 917318-4 Connector	-40 / +105


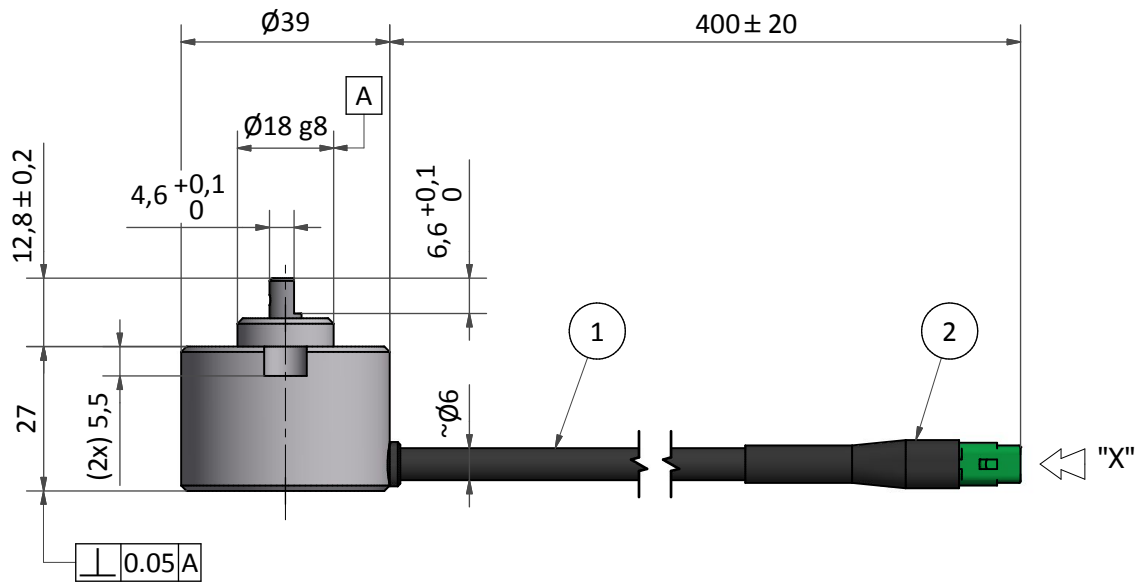


 ELEN industrial vehicles sensors				www.elensrl.com		Elen Srl - Garbagnate Milanese (MI)																																			
<table><tr><th>Rev.</th><th>Date</th><th>Sign.</th><th>Review Description</th></tr><tr><td> </td><td> </td><td> </td><td> </td></tr><tr><td> </td><td> </td><td> </td><td> </td></tr><tr><td> </td><td> </td><td> </td><td> </td></tr><tr><td> </td><td> </td><td> </td><td> </td></tr><tr><td> </td><td> </td><td> </td><td> </td></tr><tr><td> </td><td> </td><td> </td><td> </td></tr><tr><td> </td><td> </td><td> </td><td> </td></tr></table>				Rev.	Date	Sign.	Review Description																													Part Number:		AA020565-3			
				Rev.	Date	Sign.	Review Description																																		
Description:		Angular Sensor Double Sig.±45°																																							
Designed		17/01/2018		Mirko Luperi		Scale :		1 : 1 (A3 format)																																	
Checked		17/01/218		Roberto La Capruccia		Dimensions without tolerance indication: ISO 2768 - m																																			
Approved		17/01/2018		Roberto La Capruccia				Units mm																																	
						Page 1 / 2																																			


Output Signal

Signal 1 (V) @Vin = 10÷30V


Signal 2 (V) @Vin = 10÷30V

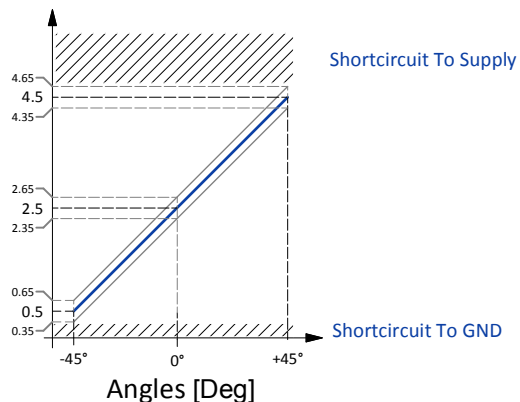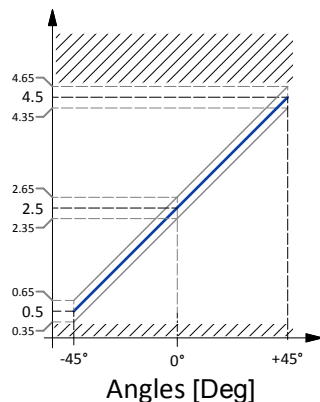

Functional Scheme

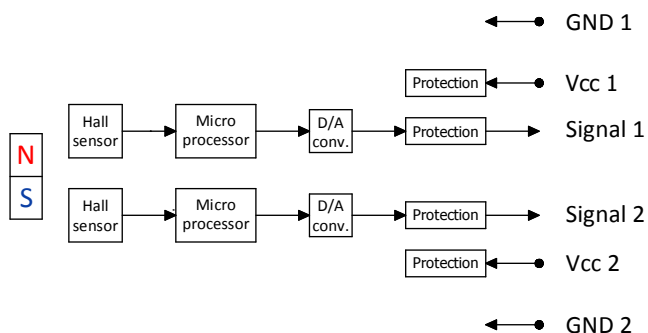

Typical Application

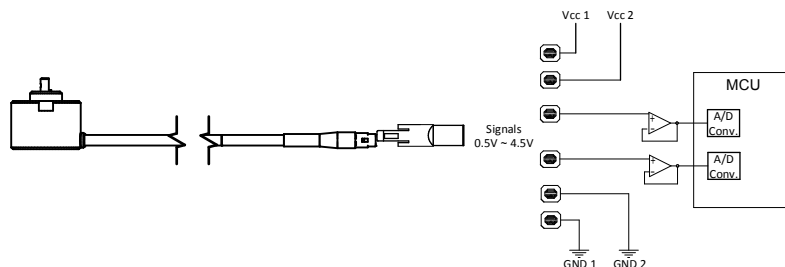

Technical Specifications

	Specific	Value	Standard Reference
Electrical	Power Supply (Vcc)	Min 10V - Max 30V	ELEN PDV Rev. 3 - 5.1
	EMC Compatibility	BCI - Class "A" - 100mA ; 1~400 MHz	ISO 11452-4
	Electrostatic Discharge Protection	±8kV Contact ; ±15kV Air Discharge	EN 61000-4-2
	Reverse Polarity Protection	-30V For 1h (-36V)	ELEN PDV Rev. 3 - 5.3
	Overload Protection	24 mA For 1h (50 mA)	ELEN PDV Rev. 3 - 5.6
	Overvoltage Protection	36V For 1h	ELEN PDV Rev. 3 - 5.7
	Output Current	Max 20 mA (For Channel)	ELEN PDV Rev. 3 - 5.5
	Maximum Load Recommended Output	220 Ohm (For Channel)	-
	Supply Current (No Load)	15mA Max (For Channel)	ELEN PDV Rev. 3 - 5.2
	Linear Output (1)	0,5V ~ 4,5V (2.5V @0°)	-
	Linear Output (2)	0,5V ~ 4,5V (2.5V @0°)	-
	Resolution	< 0,1°	-
	Temperature Operating Voltage	30V @ 105°C For 1h	ELEN PDV Rev. 3 - 5.8
	Linearity	< ±1%	-
Environmental	Dielectric Rigidity	750V @ 50Hz For 60s	ELEN PDV Rev. 3 - 5.11
	Insulation Resistance	1000 MΩ @ 500V	ELEN PDV Rev. 3 - 5.10
	Shortcircuit Protection	To GND For 5' ; To Supply For 5'	ELEN PDV Rev. 3 - 5.4
	Operating Temperature	-40°C ~ +105°C	EN 60068-2-1;EN 60068-2-2; EN 60068-2-30;EN 60068-2-14
	Storage Temperature	-40° ~ +115°C	EN 60068-2-1;EN 60068-2-2; EN 60068-2-30;EN 60068-2-14
	Degree of Protection	IP 67	IEC 60529
	Vibrations Resistance - Sine	(5÷12.87)Hz@dis±15mm, (12.87÷200)Hz@dis<±15mm@5g, 1 Octave/min, 20 Sweep Cycles	EN 60068-2-6; ISO 15998
	Vibrations Resistance - Random	f=10Hz@PSD=1.44 g2/Hz ; f=100Hz@PSD=3.85 g2/Hz ; f=1000Hz@PSD=3.85 g2/Hz ; f=2000Hz@PSD=0.96 g2/Hz ; 3 Axis - 24h For Axis	EN 60068-2-6 ENS 0310 Rev.J
Mech.	Body Material	Aluminium With Antioxidant Treatment	-
	Shaft Material	Stainless Steel	-