



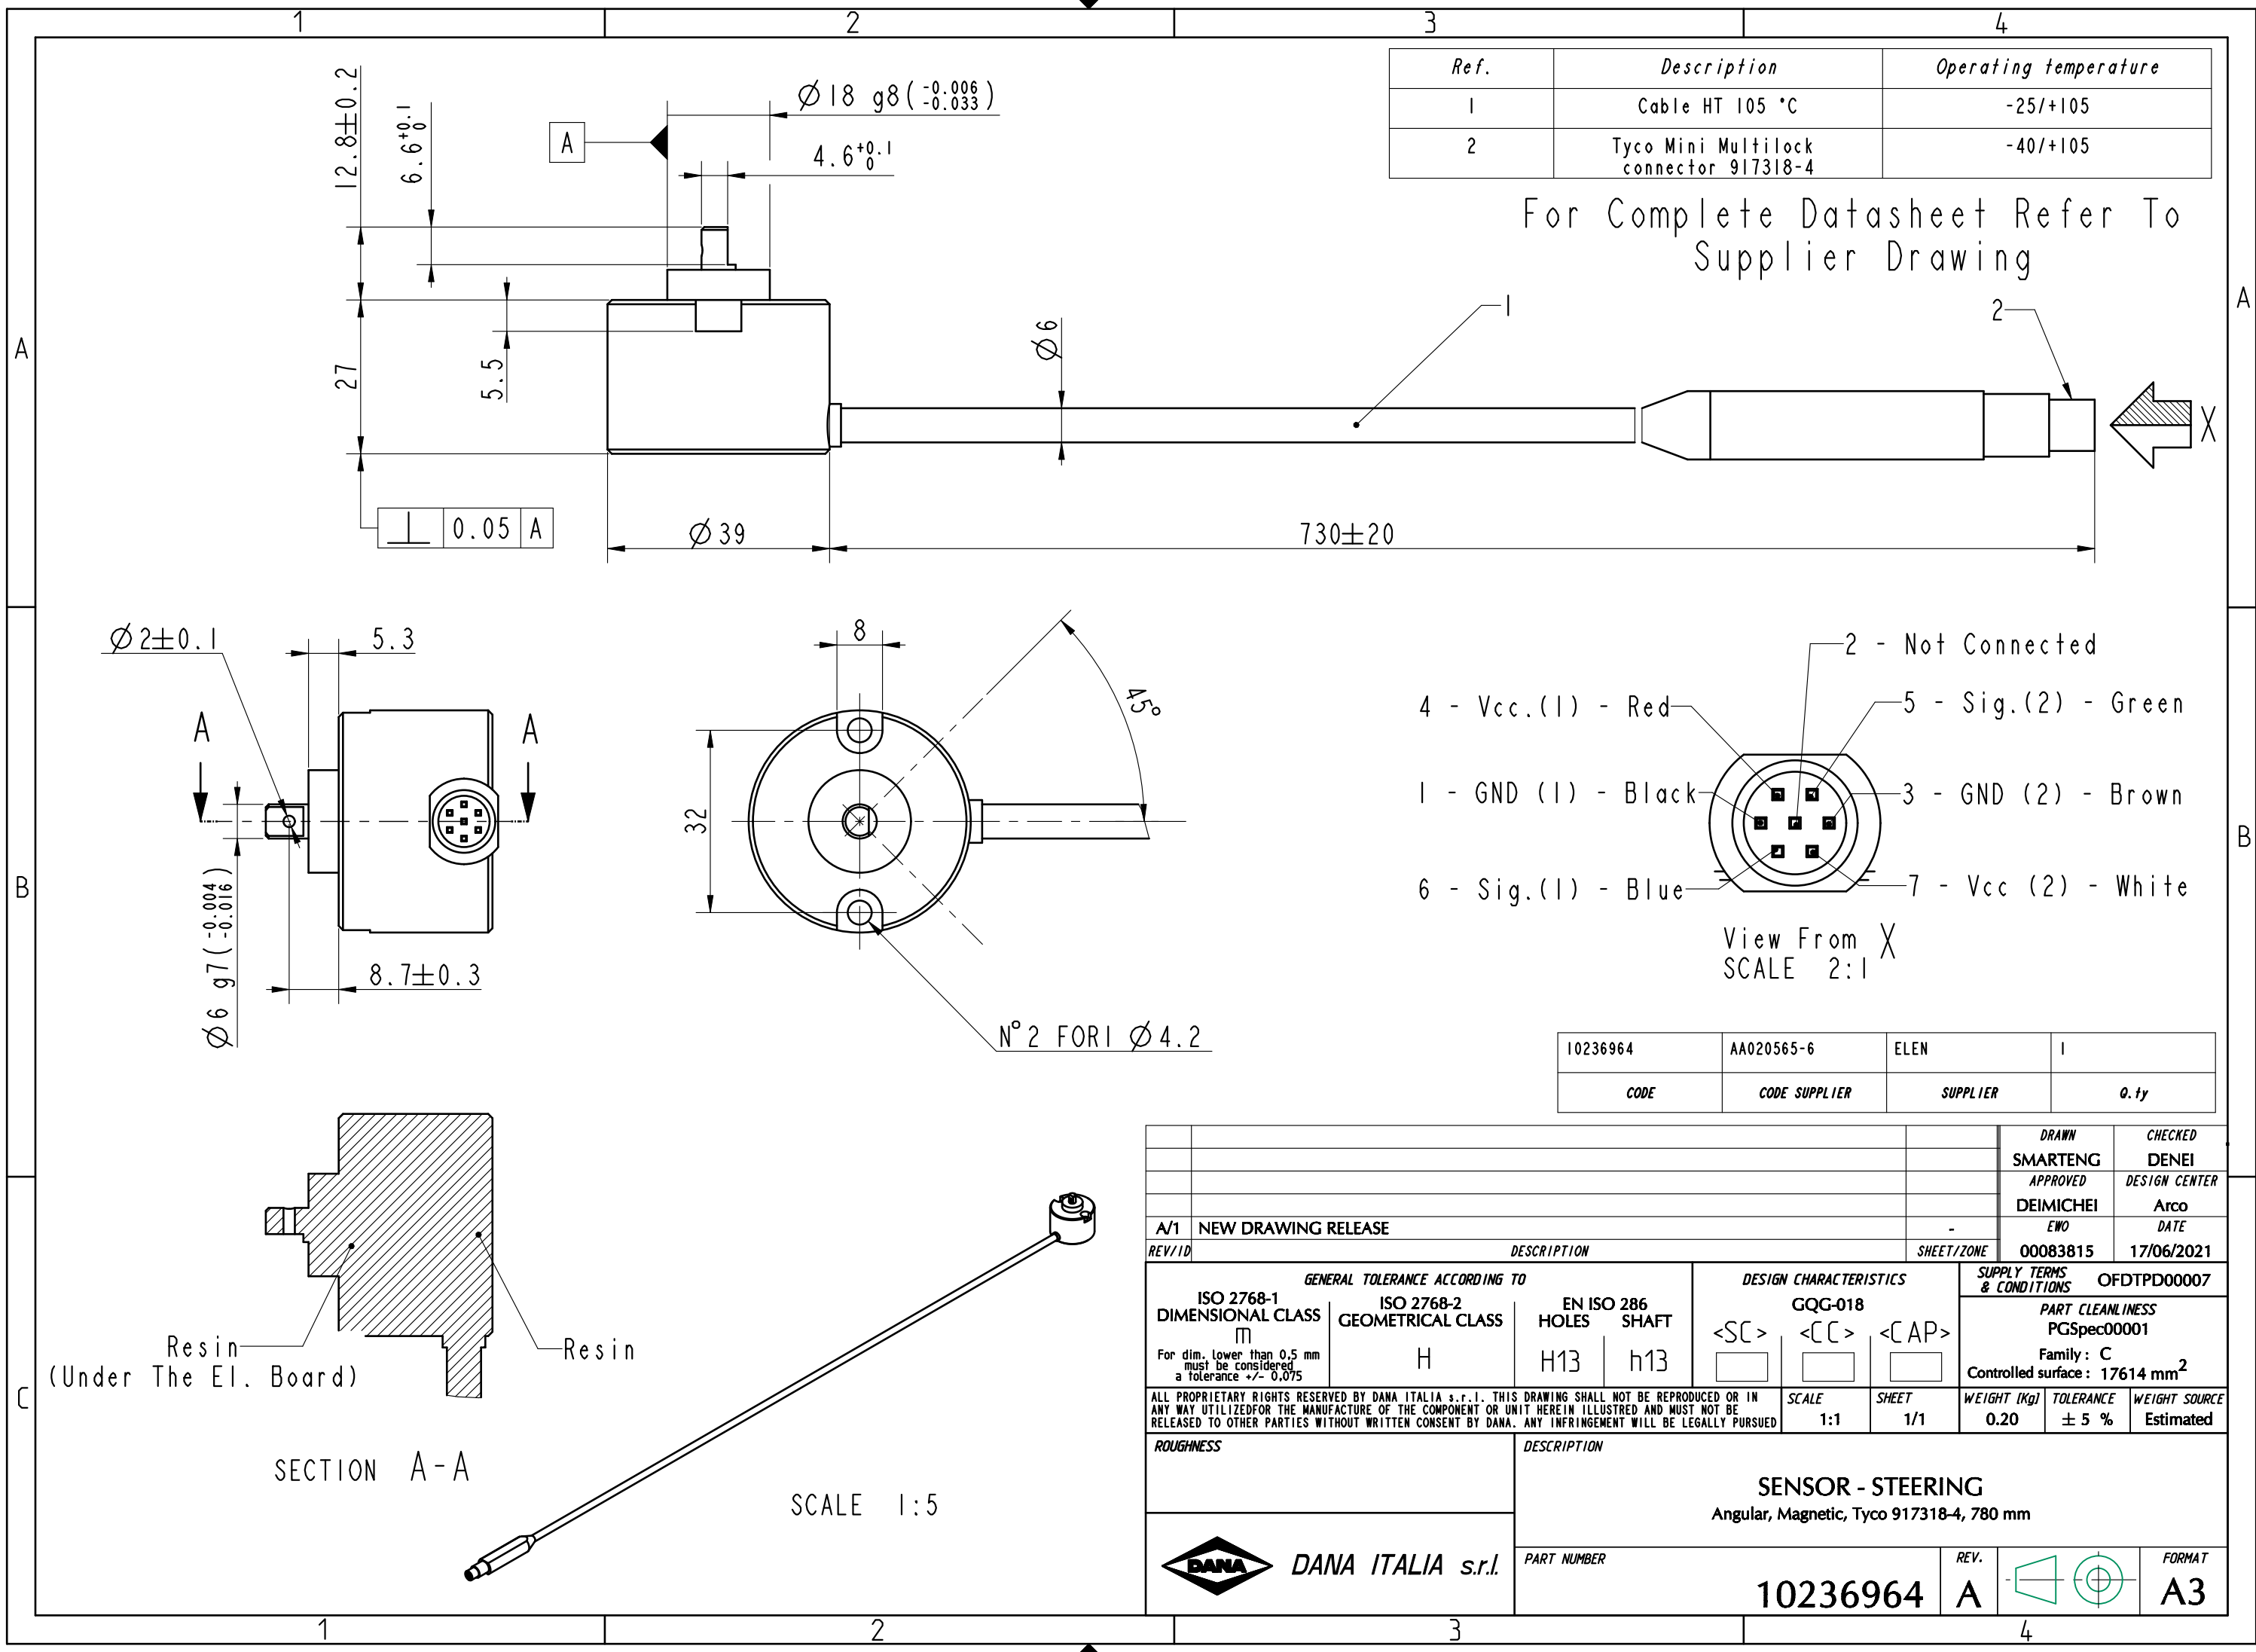

Ref.	Description	Operating temperature
1	Cable HT 105 °C	-25/+105
2	Tyco Mini Multilock connector 917318-4	-40/+105

For Complete Datasheet Refer To
Supplier Drawing

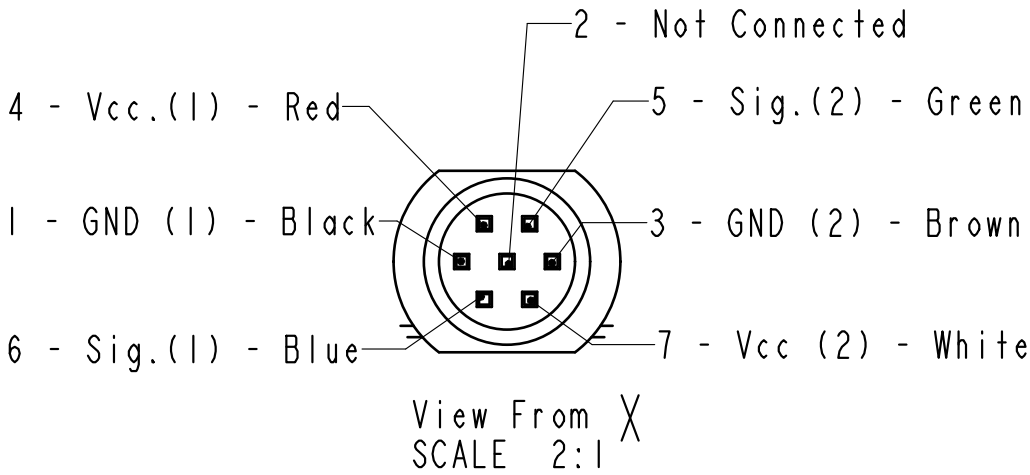

10236964	AA020565-6	ELEN	I
CODE	CODE SUPPLIER	SUPPLIER	Q. ty

A/1 NEW DRAWING RELEASE		DRAWN SMARTENG		CHECKED DENEI	
REV/ID		DESCRIPTION		SHEET/ZONE	
A/1		NEW DRAWING RELEASE		00083815	
GENERAL TOLERANCE ACCORDING TO		DESIGN CHARACTERISTICS		SUPPLY TERMS & CONDITIONS	
ISO 2768-1 DIMENSIONAL CLASS M		ISO 2768-2 GEOMETRICAL CLASS H		GQG-018 <SC> <CC> <CAP>	
For dim. lower than 0.5 mm must be considered a tolerance +/- 0.075		EN ISO 286 HOLES H13		SHAFT h13	
ALL PROPRIETARY RIGHTS RESERVED BY DANA ITALIA s.r.l. THIS DRAWING SHALL NOT BE REPRODUCED OR IN ANY WAY UTILIZED FOR THE MANUFACTURE OF THE COMPONENT OR UNIT HEREIN ILLUSTRATED AND MUST NOT BE RELEASED TO OTHER PARTIES WITHOUT WRITTEN CONSENT BY DANA. ANY INFRINGEMENT WILL BE LEGALLY PURSUED		SCALE 1:1		SHEET 1/1	
ROUGHNESS		DESCRIPTION		WEIGHT [Kg] 0.20	
DANA ITALIA s.r.l.		SENSOR - STEERING Angular, Magnetic, Tyco 917318-4, 780 mm		TOLERANCE ± 5 %	
PART NUMBER 10236964		REV. A		FORMAT A3	