

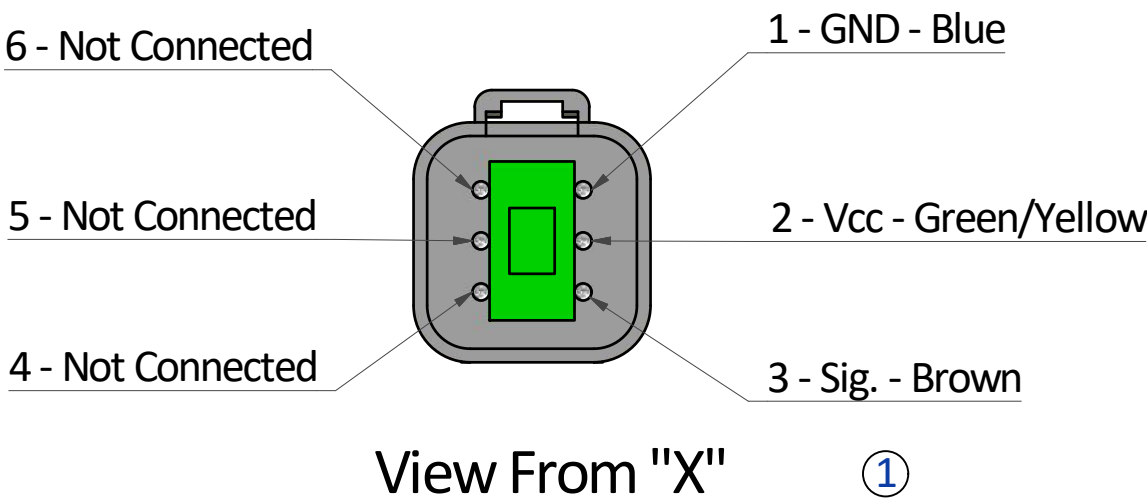
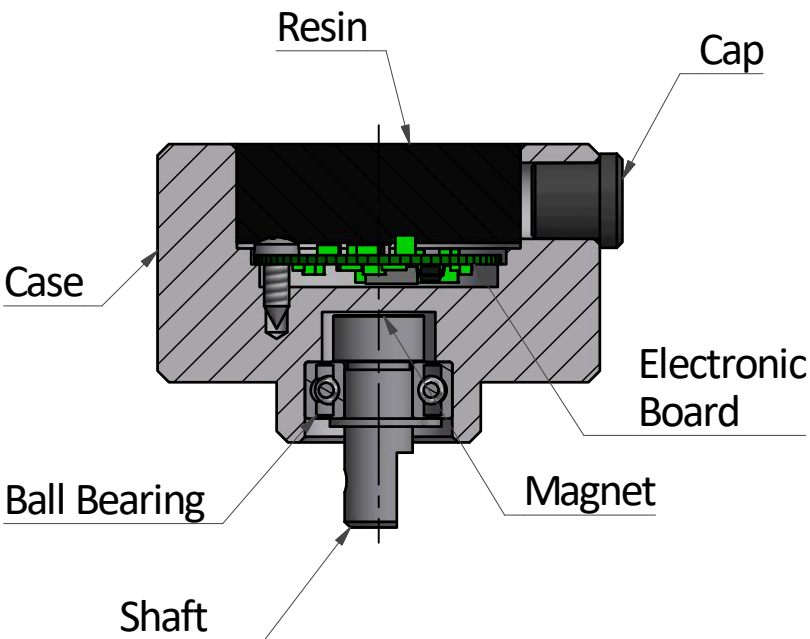
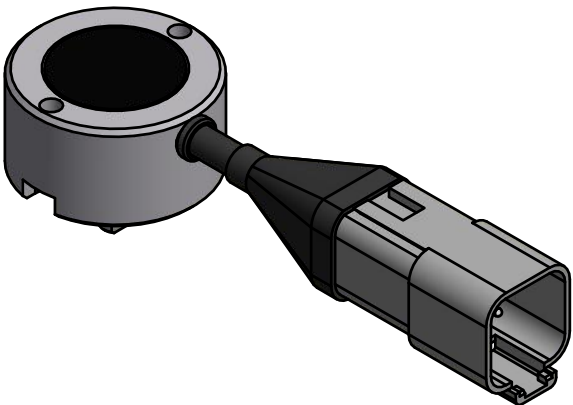
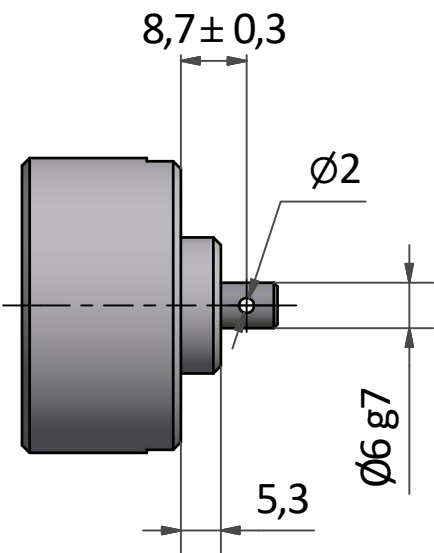


■ Angular Sensor

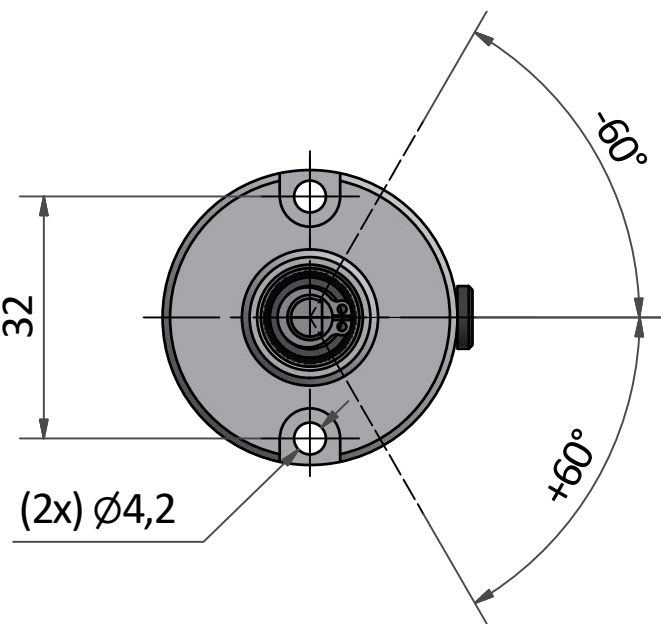

Ref.	Description	Operating temperature
1	Cable HT 105°C	-25 / +105
2	6 Pin Deutsch DT04-6P Connector	-55 / +125

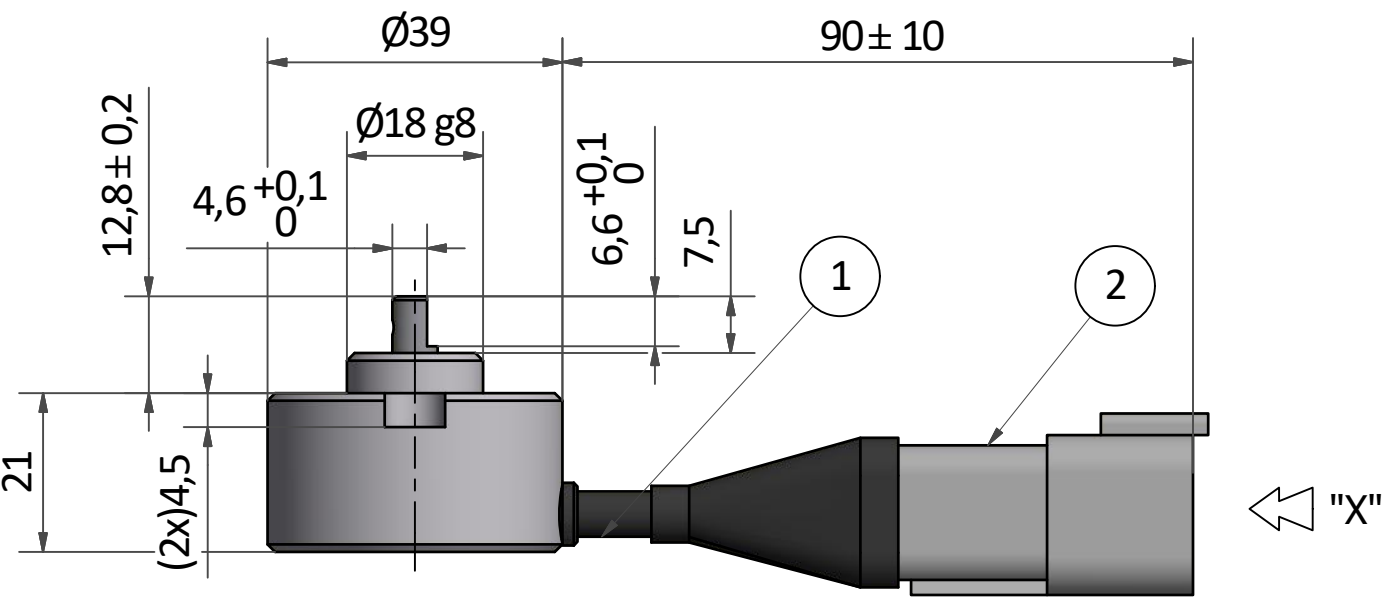

www.elensrl.com Elen Srl - Garbagnate Milanese (MI)

Part Number: AA020575-46

Description: Angular Sensor 5V ± 60°

Rev.	Date	Sign.	Review Description
1	04/05/2022	M.M.	Changed Cable Colors


Designed 26/04/2022 Matteo M. Scale: 1 : 1 (A3 format)

Checked 26/04/2022 Dimensions without tolerance indication: ISO 2768 - m


Approved 26/04/2022 Units mm Page 1 / 2

■ Output Signal


Signal (V) @Vin = 5V

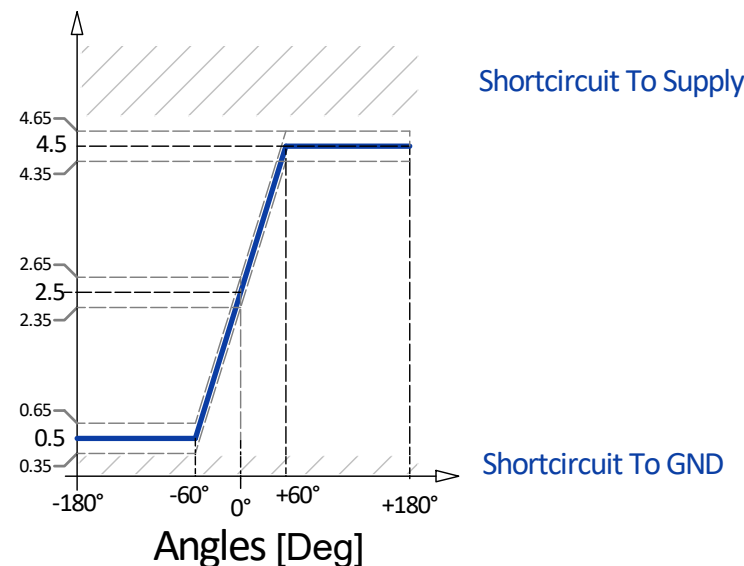

■ Functional Scheme

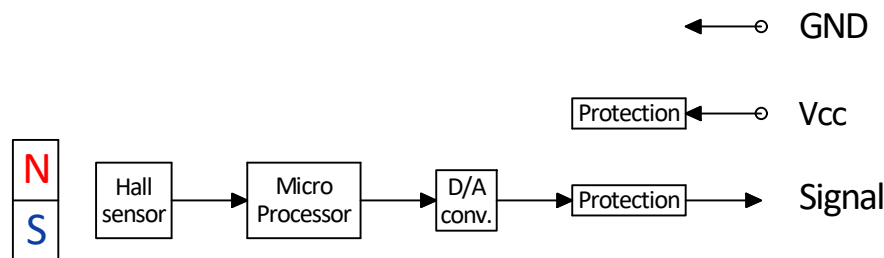

■ Typical Application

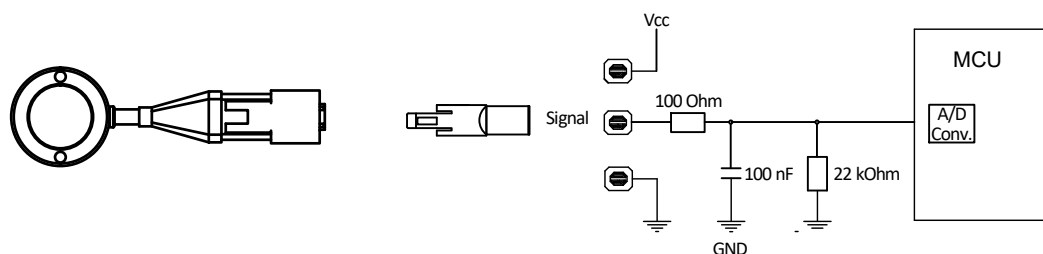

■ Technical Specifications

	Specific	Value	Standard Reference
Electrical	Power supply (Vcc)	Min 4.5V - Max 5.5V	ELEN PDV Rev. 3 - 5.1
	EMC Compatibility	BCI - Class "A" - 100mA ; 1~400 MHz	ISO 11452-4
	EMC Compatibility - Magn.Field Imm.	15Hz ÷ 150 kHz	ISO 11452-8 : 2007
	Reverse Polarity Protection	-5.5V For 1h (-20V For 1h)	ELEN PDV Rev. 3 - 5.3
	Overload Protection	1,2mA For 1h (20mA For 1h)	ELEN PDV Rev. 3 - 5.6
	Overvoltage Protection	6.5V For 1h (20V For 1h)	ELEN PDV Rev. 3 - 5.7
	Output Short Circuit Protection	To Ground For 5' To VDC For 5'	ELEN PDV Rev. 3 - 5.4
	Max Load Recommended Output	>5 kOhm	-
	Supply Current (No Load)	15 mA Max	-
	Signal Output	0.5V@-60° ÷ 4.5V@+60° (2.5V @0)	-
	Output Current	1 mA Max	-
	Dielectric Rigidity	750V@50Hz For 60s	ELEN PDV Rev. 3 - 5.11
	Electromagnetic Emissions	Broadband Radiated Emission , Narrowband Radiated	ISO 13766
	ESD Protection	±8kV Contact , ±15 kV Air	EN 61000-4-2
	Insulation Resitance	1000 MOhm@500V	ELEN PDV Rev. 3 - 5.10
	Temperature Operating Voltage	5.5V@105°C For 1h	ELEN PDV Rev. 3 - 5.7
Environmental	Operating Temperature	-40°C ÷ +105°C	IEC 60068-2-1 ; IEC 60068-2-2 ; IEC 60068-2-30 ; IEC60068-2-14
	Storage Temperature	-40°C ÷ +115°C	IEC 60068-2-1 ; IEC 60068-2-2 ; IEC 60068-2-30 ; IEC60068-2-14
	Degree Of Protection	IP 67	IEC 60529
	Vibrations Resistance - Sine	(5÷12.87) Hz@dis<±15mm ,(12,87÷200) Hz@dis±15mm@5g, 1 Octave/min , 20 Sweep Cycles	IEC 60068-2-6 ISO15998
	Vibrations Resistance - Random	f=10Hz@PSD=1.44 g2/Hz ; f=100Hz@PSD=3.85 g2/Hz ; f=1000Hz@PSD=3.85 g2/Hz ; f=2000Hz@PSD=0.96 g2/Hz ; 3 Axis - 24h For Axis	IEC 60068-2-6 ENS0310 Rev.J
Mech.	Body Material	Aluminium With Antioxidant Treatment	-
	Shaft Material	Stainless Steel	-
	Lever Material	PA66 + 30%GF	-