
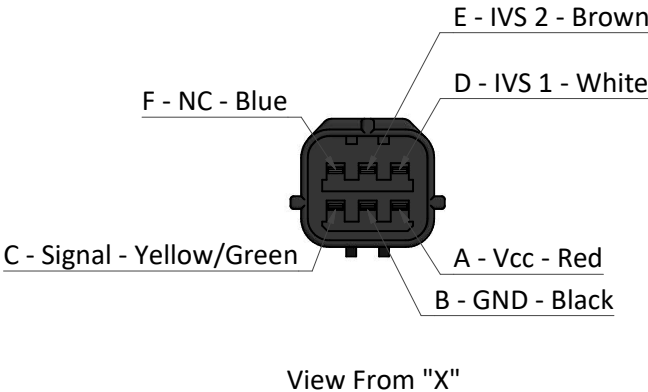
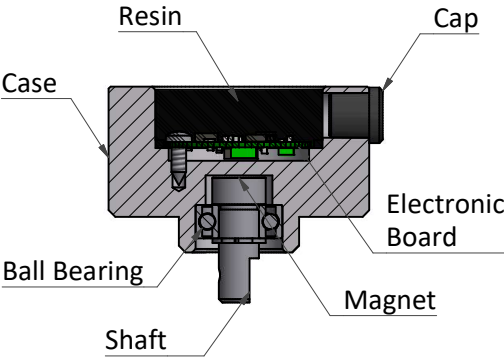
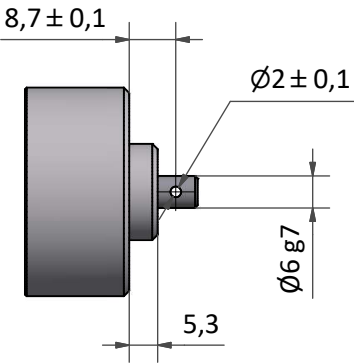
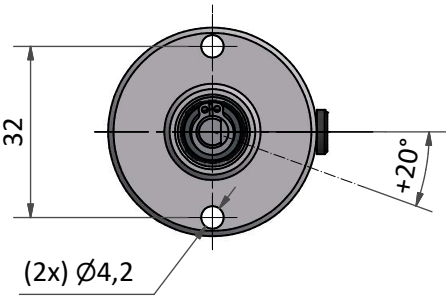



■ Angular Sensor

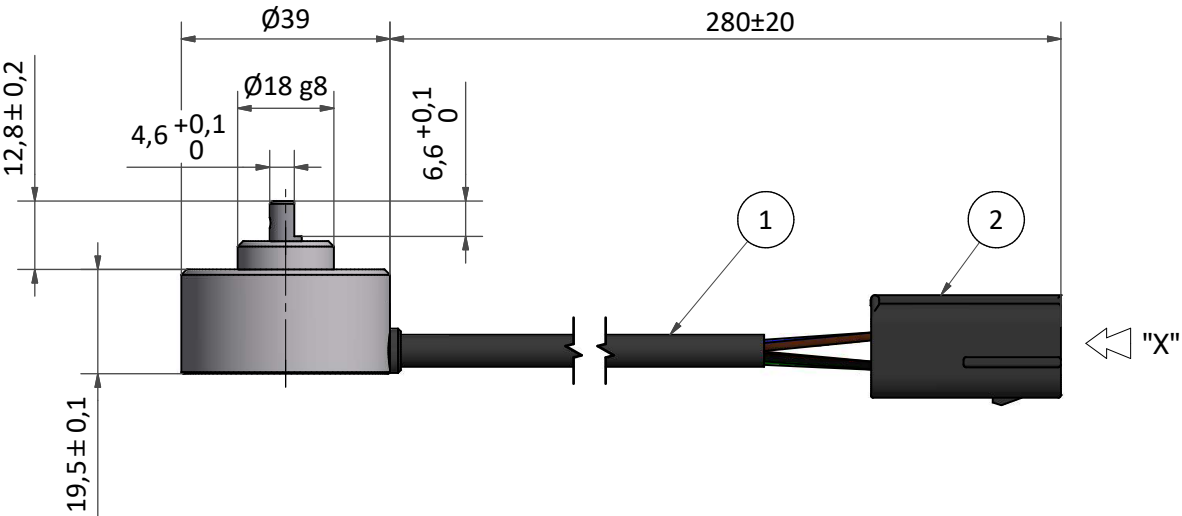


Ref.	Description	Operating temperature
1	Cable HT 105°C	-25 / +105
2	AMP J Series 6 Pins Connector 174264-2	-30 / +105

 ELEN industrial vehicles sensors				www.elensrl.com		Elen Srl - Garbagnate Milanese (MI)	
				Part Number:		AA375610	
Rev.				Description:		Angular Sensor +20° 10V	
Date	Sign.	Review Description		Designed	31/08/2020	Giulia M.	Scale : 1 : 1 (A3 format)
				Checked			Dimensions without tolerance indication: ISO 2768 - m
				Approved			Units mm
				Page 1 / 2			


■ Output Signal

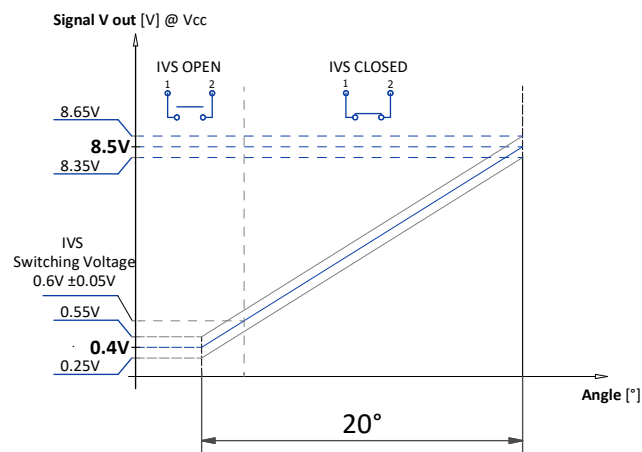

■ Functional Scheme

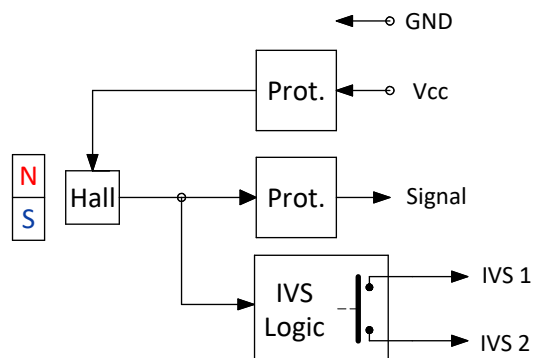

■ Typical Application

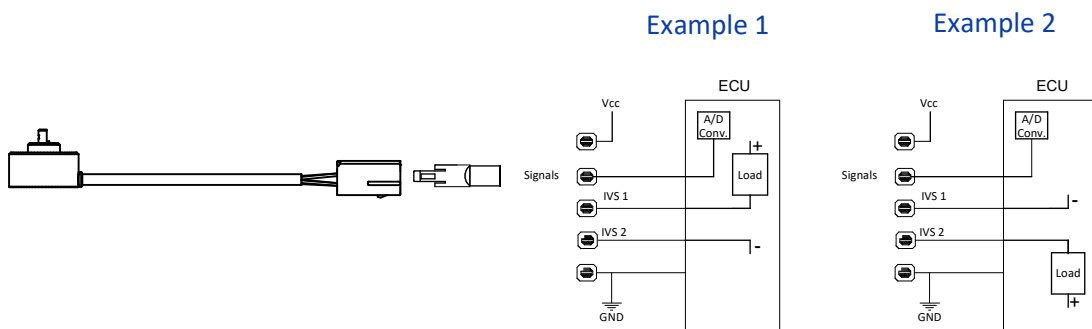

■ Technical Specifications

	Specific	Value	Standard reference
Electrical	Power Supply (Vcc)	10V ±2% (12V Max)	PDV Rev. 3 - P. 5.1;
	Output Current	20mA Max	PDV Rev. 3 - P. 5.5;
	Supply Current (no load)	15mA Max	PDV Rev. 3 - P. 5.2;
	Linear Output	0,4V ÷ 8,5V [±0.15V]	-
	Independent IVS Circuit	Optoisolated, Open@Signal Vout<0,6V; Closed@ Signal Vout>0,6V; Max 120mA (Peak AC,DC); Max 350V (Peak AC, DC)	PDV Rev. 3 - P. 5.9;
	Overload Protection	24mA For 1h	PDV Rev. 3 - P. 5.6;
	Overvoltage Protection	15V for 1h	PDV Rev. 3 - P. 5.7;
	Temperature Operating Voltage	12V @ 85°	PDV Rev. 3 - P. 5.8;
	Reverse Polarity Protection	-12V For 1h	PDV Rev. 3 - P. 5.3;
	Shortcircuit Protection	To Ground For 5' ; To Supply For 5'	PDV Rev. 3 - P. 5.4;
	Insulation Resistance	1000MΩ@500V	PDV Rev. 3 - P. 5.10;
	Dielectric Rigidity	750V@50Hz For 60s	PDV Rev. 3 - P. 5.11;
	ESD Protection	±8kV Contact; ±15kV Air	EN 61000-4-2;
	Transient Voltage Protection	Pulses 1, 2A, 2B , 3A , 3B , 4	ISO 7637-2:2011 ; ISO 16750-2:2012
	Load Dump Transient	Test A (V Supply 12V)	
Environmental	Linearity	<±1%	-
	Resolution	12 bit	-
	Operating Temperature	-40°C ÷ +85°C	IEC 60068-2-14;IEC60068-2-1; IEC60068-2-2;IEC60068-2-30
	Degree Of Protection	IP67	IEC 60529;
	Storage Temperature	-40°C ÷ +105°C	IEC 60068-2-14;IEC60068-2-1; IEC60068-2-2;IEC60068-2-30
	Vibrations Resistance - Random	f=10Hz@PSD=1.44g2/Hz; f=100Hz@PSD=3.85 g2/Hz; f=1000Hz@PSD=3.85g2/Hz; f=2000Hz@PSD=0.96g2/Hz; 3 Axes - 24h for Axis	IEC 60068-2-64; ENS 0310 Rev.J
	Vibrations Resistance - Sine	(5÷12.87)Hz@dis±15mm, (12.87÷200)Hz@dis±15mm@5g, 1 Octave/min, 20 Sweep Cycles	EN 60068-2-6; ISO 15998
	EMC Compatibility - Magnetic Field Immunity	15Hz ÷ 150 kHz	ISO11452-8:2007;
	EMC Compatibility - BCI	BCI Class "A" - 100mA; (1÷400)MHz	ISO11452-4;
Mech.	Body Material	Aluminium With Antioxidant Treatment	-
	Shaft Material	Stainless Steel	-